


Solar Charge Controller 12 V 20 A

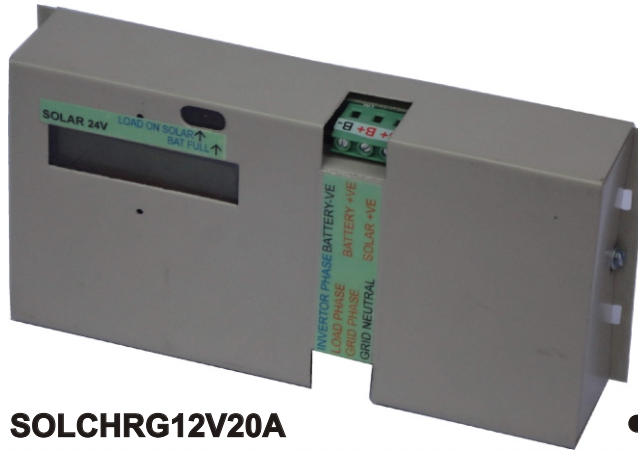

Model SOLCHRG12V20A

- Solar Panel Power upto 250W maximum
- Auto high battery charge cutoff at 14.5 V
- Auto low battery load cutoff 10.5 V or transfer to grid power 11.5 V
- Recommended battery 40 AH to 150 AH
- 16 char X 2 lines alphanumeric display
Displays digitally The battery voltage, the solar voltage

☎ **2582 1011, 67982220**

New Age Electronics

110 New Modella Indl Estate, Padwalnagar,
Thane (W) 400 604

- When Grid power is present solar charge controller conserves battery when battery volt falls below 11.5 V and tranfers load to grid. If grid fails after load is transferred to grid it transfers the load back to battery until battery is completely discharged upto 10.5 volt or grid is restored
- Intelligent microcontroller handles all the charging
- Warrantee of unit 1 year

☎ **2712 3136, 30623136**

Ioline Data Systems

26 Electronic Sadan 2, MIDC Bhosari,
Pimpri, Pune 411 026