


Solar Charge Controller 24 V 20 A

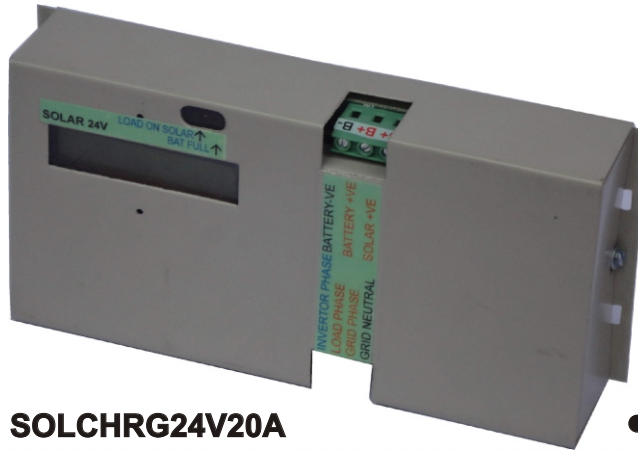

Model SOLCHRG24V20A

- Solar Panel Power upto 500W maximum
- Auto high battery charge cutoff at 29.0 V
- Auto low battery load cutoff 21.0 V or transfer to grid power 23.0 V
- Recommended battery 40 AH to 150 AH
- 16 char X 2 lines alphanumeric display
Displays digitally The battery voltage, the solar voltage

☎ **2582 1011, 67982220**

New Age Electronics

110 New Modella Indl Estate, Padwalnagar,
Thane (W) 400 604

- When Grid power is present solar charge controller conserves battery when battery volt falls below 23.0 V and tranfers load to grid. If grid fails after load is transferred to grid it transfers the load back to battery until battery is completely discharged upto 21.0 volt or grid is restored
- Intelligent microcontroller handles all the charging
- Warrantee of unit 1 year

☎ **2712 3136, 30623136**

Ioline Data Systems

26 Electronic Sadan 2, MIDC Bhosari,
Pimpri, Pune 411 026